



Mantarray 60


The Mantarray 60 is a high-output, arrayable point source loudspeaker designed for demanding professional audio applications. With a nominal 60° x 40° (HxV) dispersion pattern and exceptional off-axis performance, it ensures precise coverage and seamless integration in side-by-side array configurations.

Key Features:

- Array-optimized
- Integrated Fly Points
- Compact
- Exceptional Sensitivity
- Custom Risers Available

Applications:

- Touring
- Venue Installation
- Pop-up Stages
- Restaurant or Event Space Installation

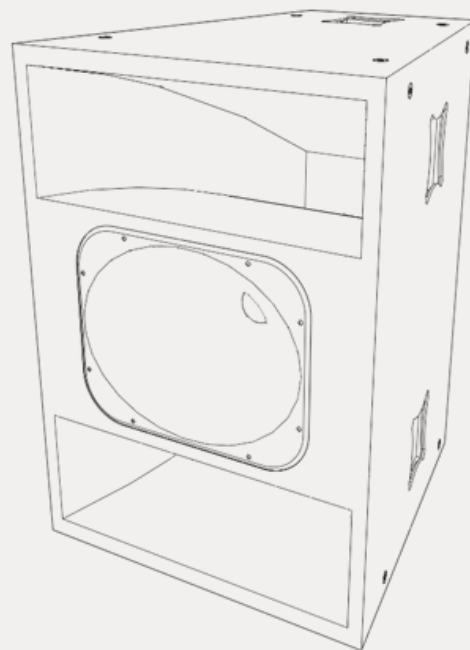

Specifications

Frequency Response (-3 dB): 200 Hz - 20 kHz

Frequency Response (-10 dB): 100 Hz - 20 kHz

Dispersion Pattern (Horizontal x Vertical): 60° x 40°

Weight: 100 lbs

Connections: 2 x NL4

Dimensions (W x H x D): 22" x 30.5" x 24"

Driver Specification

Driver	Crossover Frequency	Power (Nominal, Continuous)	Driver Impedance	Nominal Impedance	Sensitivity (1w/1m)	Pinouts
1.4"	800 Hz - 20 kHz	110 W, 220 W	8Ω	8Ω	111 dB	2+, 2-
12"	185 Hz - 800 kHz	800 W, 1600 W	8Ω	4Ω / 16Ω	108 dB	1+, 1-