HSD SOUND SYSTEMS

Southpaw


The Southpaw is a high-mid extension cabinet designed to enhance coverage in larger or asymmetrical deployments. It features the same 8" midrange and 1.4" compression driver as the Uppercut ensuring consistent voicing, clarity, and seamless integration. Ideal for use as a front-fill, outfill, or delay speaker.

Key Features:

- Compact Design
- Custom Mounting
- Affordable Solution
- Center/ Rear Fill
- Uppercut Reinforcement

Applications:

- Monitor Solution
- Venue Installation
- Pop-up Stages
- Restaurant or Event Space Installation

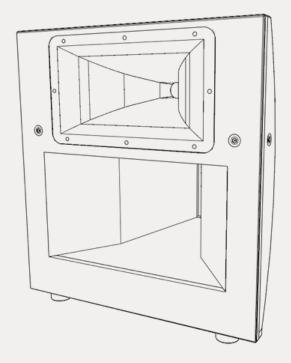

Specifications

Frequency Response (-3 dB): 220 Hz - 20 kHz Frequency Response (-10 dB): 200 Hz - 20 kHz Dispersion Pattern (Horizontal x Vertical): 60° x 40°

Weight: 50 lbs

Connections: 2 x NL4

Dimensions (W x H x D): 24" x 40.75" x 24"

Driver Specification

Driver	Crossover Frequency	Power (Nominal, Continuous)	Driver Impedance	Nominal Impedance	Sensitivity (1w/1m)	Pinouts
1.4"	1.2 kHz - 20kHz	100 W, 200 W	8Ω	8Ω	108.5 dB	1+, 1-
8"	220 Hz - 1.2 kHz	250 W, 500 W	8Ω	8Ω	106 dB	2+, 2-