

HSD SOUND SYSTEMS

Uppercut


The Uppercut is a medium-format, full-range cabinet designed to deliver exceptional clarity and coverage across mid-bass and high-frequency ranges. Featuring a tri-amped configuration, it integrates a powerful and precise 15" woofer, an 8" midrange driver, and a 1.4" compression driver to achieve balanced, full-spectrum sound performance.

Key Features:

- Full-Range
- Integrated Fly Points
- Compact
- High-Output
- Affordable Solution
- Custom Risers Available

Applications:

- Touring
- Venue Installation
- Pop-up Stages
- Restaurant or Event Space Installation

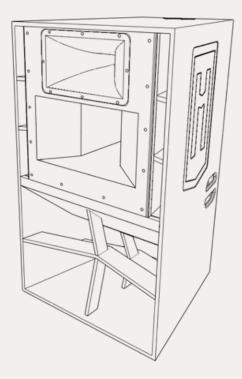

Specifications

Frequency Response (-3 dB): 45 Hz - 20 kHz Frequency Response (-10 dB): 35 Hz - 20 kHz

Dispersion Pattern (Horizontal x Vertical): $60^{\circ} \times 40^{\circ}$

Weight: 128 lbs

Connections: 2 x NL8

Dimensions (W x H x D): 24" x 40.75" x 24"

Driver Specification

Driver	Crossover Frequency	Power (Nominal, Continuous)	Driver Impedance	Nominal Impedance	Sensitivity (1w/1m)	Pinouts
1.4"	1.2 kHz - 20kHz	100 W, 200 W	8Ω	8Ω	108.5 dB	1+, 1-
8"	220 Hz - 1.2 kHz	250 W, 500 W	8Ω	8Ω	106 dB	2+, 2-
15"	65 Hz - 220 Hz	1200 W, 2400 W	8Ω	8Ω	105 dB	3+, 3-